



FT 8392


Avery Dennison FT 8392 is a 3.6 mil double coated polyester with a foam bonding modified acrylic adhesive on the laminating side and a high shear rubber adhesive on the mounting side. It is designed for bonding a wide variety of foams and fabrics to low surface energy materials. FT 8392 is commonly used for foam bonding applications in the automotive industry.

FEATURES:

- Double coated tape construction with a differential adhesive system
- Foam bonding modified acrylic adhesive on the laminating side
- High shear rubber adhesive on mounting side
- Polyester film carrier
- Super calendered kraft release liner

BENEFITS:

- Dimensional stability and good die cutting characteristics
- Strong bond to high and medium surface energy materials and good foam bonding performance
- Strong bond to a wide variety of low surface energy materials and high heat resistance
- High tensile strength and good converting performance
- High tensile strength and tear resistance with excellent die cutting performance

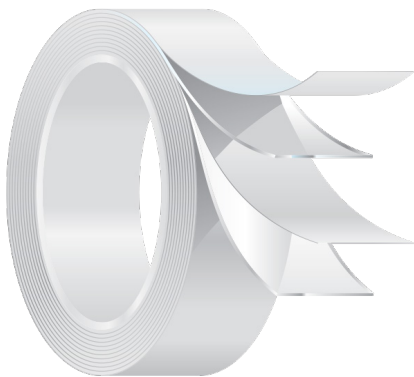

CONSTRUCTION:

Liner:

80# White Kraft

Adhesive:

Rubber

Carrier:

Polyester

Adhesive:

Acrylic

FT 8392

Adhesive Properties:		Typical Values		
Thickness	ASTM D-3652	US mil	mm	micron (µm)
Liner		4.4	0.11	110
Adhesive - Unwind		1.6	0.04	40
Carrier		0.5	0.01	15
Adhesive - Liner		1.5	0.04	40
Total Caliper without Liner:		3.6	0.09	95
Total Caliper:		8.0	0.20	205

PEEL ADHESION		Test Method(s): PSTC-101, ASTM D-3330		
2 mil PET 72 hr dwell 180° 12 in /min (305 mm / min)				
Substrate		Lbf / In	N / Meter	
SS	Liner	8.0	1,400	
	Unwind	5.5	960	
ABS	Liner	7.0	1,230	
PP	Liner	5.0	880	

LOOP TACK		Test Method(s): PSTC-16		
2 mil PET Initial 20 in / min (508 mm / min)				
Substrate		Lbf / In	N / Meter	
SS	Liner	13.0	2,280	

STATIC SHEAR		Test Method(s): PSTC-107, ASTM D 3654		
2 mil PET 72 hr dwell 1" sq (6.5 cm2) 1000 g				
Substrate		Mins to Fail		
SS	Liner	10,000		

TEMPERATURES	° F	° C
Minimum Application Temperature	50° F	10° C
Minimum Service Temperature	-40° F	-40° C
Maximum Service Temperature	175° F	80° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2017 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469